

# STX-MAN18V32/40

柴油机发电机组



## STX-MAN 18V32/40



适用于造船



适用于陆用电站



# > STX-MAN 18V32/40

- > 1) 柴油机机型: STX-MAN 18V32 /40
- > 2)> Parameters: 8640 Kw x 720 RPM x 1 3.8 kv x 60 Hz
- > >3) Quantity: 12 units
- > >4) Fuel: HFO or MDO
- > >5) Factory: STX Engine Co., Ltd. - MAN authorized factory / Korea
- > >6) Production date: January-December 2011
- > >7) Test date: March-September 2011
- > >8) 3-phase generator set model: HYUNDAI HAR7 1 89-1028
- > >9) Turbocharger model: NR34/S
- > >Technical parameters:
- > >Bore x Stroke: 320 MM x 400 MM
- > >Rotation R.P.M.: 720rpm
- > > Average piston effective pressure: 25.90 Bar
- > >Diesel engine output: 9,080 kW
- > > Generator output: 8,640 kW
- > >60Hz AC 1 3.8 KV 参数: 8640 Kw x 720 RPM x 1 3.8 kv x 60 Hz
- > > 60Hz AC 1 3.8 KV

# STX-MAN 18V32/40

**Fuel consumption 燃油** | **MCR**  
消耗.

**According to ISO  
3046/I (reference  
conditions)**

**According to ISO  
3046/I (on the site)**

Heavy fuel oil 重油

183+5% g/kWh

Diesel oil/MD。船用 柴油

185+5% g/kWh




Lubricating oil consumption 滑油消耗量

g/kWh

# STX-MAN 18V32/40

5.4 Kg/h

# STX-MAN 18V32/40

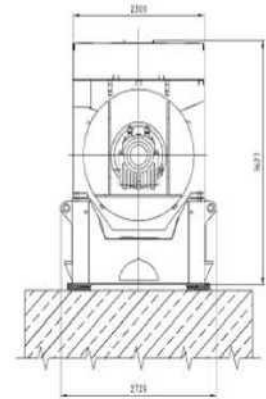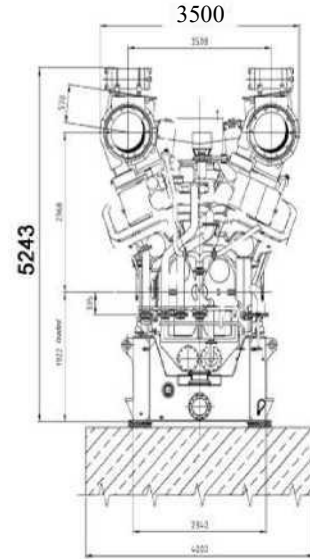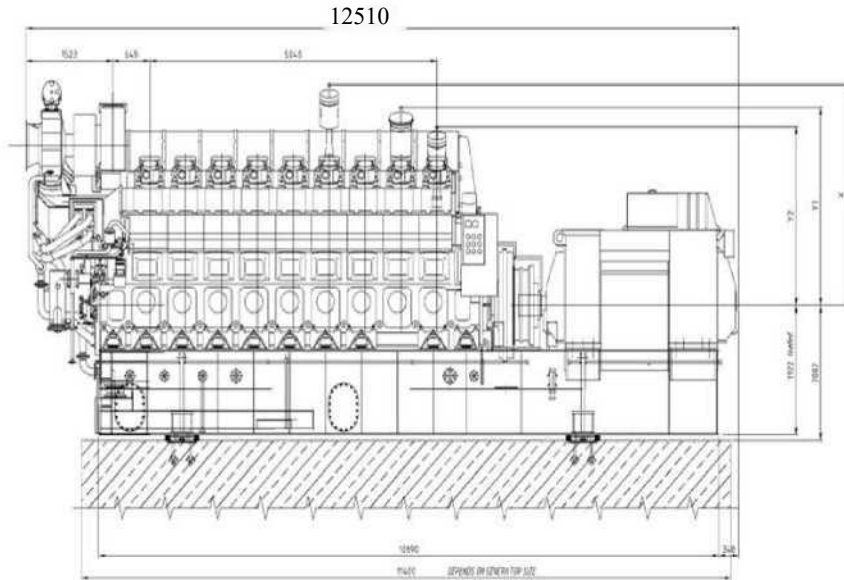


柴油机重量

805000KCG



# STX-MAN 18V32/40

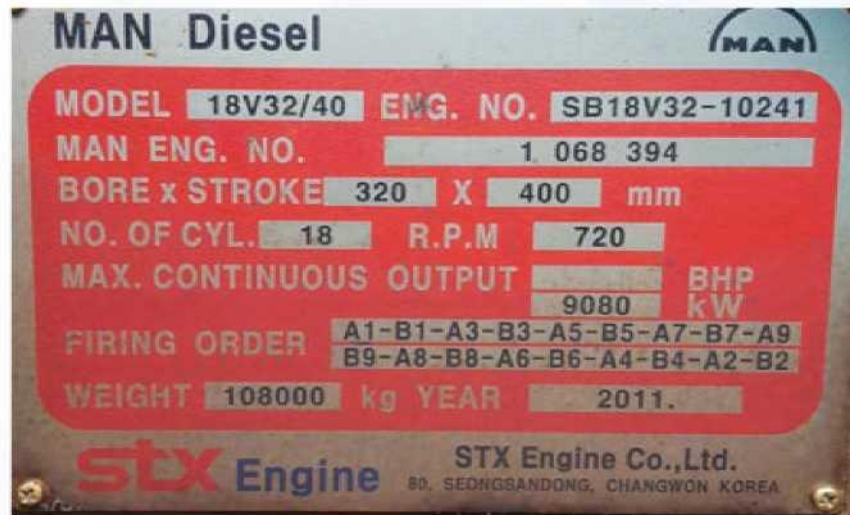

柴 油 机 铭 牌

# STX-MAN 18V32/40



发电机

HYUNEMH

3-SYN. GENERATOR

Uaffi	11032 KVA	AC 13B00	V	461J5	A«P	60	HZ:
TYPE		KAR7 1B9-W28		Q0NNEG10NI RATING		HCONT	
RULE		WA		INSULATION CLASS		F	
PROTECTOR DEGREE		IP IC2A11		EXCITER VOLTAGE		as	VDC
REVOLUTION		720		RPM EXCITER AMP		8L5	ADC
AMBIENT TEMP.		和		TEMP. RISE(ARMATURE)		F	
POWER FACTOR		0.8		TEMP RISE(FIELD)		F	
wownwG		IM1101(R20)		O4LTYPE		ISOVG46	
BEARFNG(DJE)		PH2aixL2SQ		SEARlg: III E)		PH280xL213u2	
INITIAL SUPPLY(DÉ)		34 LITER		INITIAL SUPPLY(N-D.E)		34 LITER	
SPACE HEATER		1 #		230 V		1000 w	
WEIGHT		30500	KG	MANUFACTG DATE		2010.11	
SERIAL NO.		2(M«M84RfiHg8a2		APPLCABLE COOE : IEC 60034			

MADE IN KOREA

4M-O7a990

铭牌



**STX  
MAN  
18V32/4**

# STX MAN 18V32/40



# STX MAN 18V32/4

